

## **ARTICLE 7. PRIMARY DISTRICTS**

### **7:1. Permitted uses.**

See section 6.1, Table 1.

### **7:2. Minimum lot area.**

The minimum lot areas per dwelling unit for each zoning district are listed in section 7.3, Table 1 unless otherwise required by the South Carolina Department of Health and Environmental Control (SCDHEC).

### **7:3. Yard and setback requirements.**

All setback lines adjacent to a public right-of-way are measured from the edge of the public right-of-way. When the right-of-way is not known, the setback shall be measured from the edge of the pavement or back of the curb, if present, and each required setback shall be increased by a minimum of ten feet.

In such cases in the residential zone where the frontage along both sides of the street is at least 50 percent developed, then the required front yard setback for a new structure not the subject of a site plan or subdivision application may be modified to the average for the existing development.

Setbacks from existing roads will be consistent with the requirements outlined in the appropriate zoning district and listed in Table 1.

**Table 1:  
Schedule of Lot Area, Yard, Setback, and Density By District**


	R	RRL	RP	RC	VC	CC	GC	ID	RE	MB
<b>Minimum Lot per Unit</b>										
Non Residential Area (SF)	40,000	N/A	2 acres	2 acres	10,000	10,000	10,000	12,000	2 acres	12,000
<b>Residential</b>										
Single-Family	.5 acre	7,800	1 acre	5 acres	.5 acre	(B)	(A)	N/A	N/A	N/A
Patio	N/A	N/A	N/A	N/A	N/A	(B)	3,500	N/A	N/A	N/A
Duplex	N/A	N/A	N/A	N/A	(B)	(B)	(A)	N/A	N/A	N/A
Townhome	N/A	N/A	N/A	N/A	N/A	3,500	2,000	N/A	N/A	N/A
(A) 4 per acre for single-family dwelling units; 6 per acre for attached units.										
(B) 2 per acre for single-family dwelling units; 4 per acre for attached units.										

	Multi-Family, Single-Family and Nonresidential Uses										Patio	Duplex	Townhome
	R	RP	RC	VC	CC	GC	ID	RE	MB	All Districts			
<b>Minimum Yard and Building Setback (feet)</b>													
Minimum lot width	50 100	200	200	100	80 100	80 100	90 100	200	90 100	Minimum lot width	45	50	20
<i>Front</i>													
Major Street (Multi-Lane)	60	60	60	60	60	60	60	200	60	Major Street (Multi-lane)	60*	60*	60*
Major Street (Two-lane)	35	45	45	35	35	35	45	200	45	Major Street (Two-lane)	35	35	35
Minor Street	25	25	25	25	25	25	25	160	25	Minor Street	25	25	20
<i>Side</i>													
Residential	10	25	50	5	5	5	N/A	N/A	N/A	Interior	N/A	N/A	N/A
Non-residential	10	25	50	5	5	5	10	100	10	Street-side/Exterior	5	10	5
<i>Rear</i>													
Residential	25	25	100	10	10	10	N/A	100	N/A	Residential	20	20	5
Non-residential	40	50	150	10	10	10	15	100	15	Non-residential	N/A	N/A	N/A
*Access to units along a multi-lane major street shall generally have a common access onto a frontage road or similar, which shall be considered a minor street; the frontage road or similar may encroach into the 60' front setback from the multi-lane major street.													

(Ord. No. 09-06, § 7, 2-2-09; Ord. No. 09-12, § 11, 5-4-09; Ord. No. 09-38, § 1, 11-2-09; Ord. No. 11-24, § 7, 9-6-11; Ord. No. 13-04, § 3, 4-1-13)

#### 7:4. Riparian buffers.

A riparian buffer shall be provided along tidelands, wetlands, streams and rivers. Buffers and setback lines are measured from OCRM designated critical lines for tidelands; delineation lines for wetlands; and from stream banks and river banks. Setbacks are inclusive of the required buffer area. For example, an individual dwelling unit requires a 50' undeveloped buffer from the OCRM critical line and an additional 10' setback for the building (a total of 60' setback from the OCRM critical line).

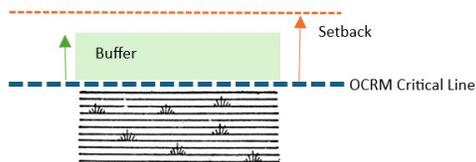

The buffer area shall remain undeveloped, except for piers, docks and pervious access paths to the water or wetlands bank. Any disturbance of the buffer area shall adhere to OCRM's Best Management Practices (BMPs). Riparian buffers shall also be in accordance with any applicable state and federal regulation.

Buffer widths are based on land use. In the event that a setback standard in section 7:3 is less than the required buffer width, the required buffer regulation applies.

**Riparian Buffer and Setback Table**

Water Resource	BUFFER	SETBACKS			
		Individual Dwelling Unit	Single-Family Residential Development	Multi-Family Residential	Non-Residential
Critical Area (Coastal Waters, Tidelands, Marshes, Beach/Dune System)	50'*	<del>15'</del> 60'	25' 60'	35' 100'	50' 100'
Jurisdictional <del>Freshwater</del> Wetlands, <del>Saltwater of Freshwater</del>	20'*	<del>15'</del> 30'	25' 50'	35' 50'	50'
Non-Jurisdictional Freshwater Wetlands	20'*	30'	50'	35' 50'	50'
Rivers, Streams (non critical area)	50'	<del>25'</del> 60'	50'	50' 100'	50' 100'
The above setbacks buffers are total average widths; with widths not to be less than <del>15'</del> 10 feet for a <del>25'</del> 20-foot buffer, <del>20'</del> feet for a <del>35'</del> foot buffer, and 30 feet for a 50-foot buffer.					
* Buffer requirement may be waived or reduced if applicant provides an OCRM land disturbance permit and/or approved wetland mitigation plan as part of a PDD, Subdivision or Development Plan submittal.					

See Section 8.9 for additional buffer requirements within the Euhaw Overlay District.

Maintenance within a riparian buffer will adhere to the following limitations:

1. Trees can be limbed up to 15 feet.
2. Under brush can be cleared down to no less than four inches above grade.
3. Unprotected trees under three-inch caliper can be cut.

**Uses Allowed Between Building Setback and River Buffer.** The area located between the building setback and river buffer is called the transitional buffer. The purpose of this buffer is to allow for a construction envelope between the building and river buffer for the river buffer to be protected from construction damage. The following uses are permitted within the transitional buffer once construction is completed:

1. Residential - playgrounds, fire pits, outdoor furniture, pervious hardscapes, uncovered decks, pools, etc.
2. Non-Residential - picnic shelters, pervious hardscapes such as sidewalks and patios, etc.

(Ord. No. 09-37, § 2, 11-2-09)

**7:5. Maximum height.**

Maximum building height in all districts is 35 feet. Height measurement shall be made from the average finished grade elevation at the building line to the mean roof height.

The maximum building height may be increased to 50 feet, measured from the average finished grade elevation at the building line to the mean roof height, in areas where there is a public water distribution system and the Fire Chief or their appointed designee, confirms that there is adequate firefighting equipment capable of fighting a structure fire available in such areas to safely accommodate the increased height.

Chimneys, elevators, poles, spires, tanks, towers, and other projections not used for human occupancy may exceed the district height limit.

Flagpoles shall not exceed 35 feet in height measured from the average finished grade except where flags are expressly permitted in Article 15, Sign Standards.