



NOTICE OF INVITATION TO BID
IVTB #2025-13
HONEY HILL DRIVEWAY
JASPER COUNTY, SOUTH CAROLINA
OCTOBER 10, 2025

Notice is hereby given that sealed bids will be received for the **Honey Hill Battlefield Driveway Sight Distance Clearing** project located on SC Highway 336 at 1913 Old House Road, Ridgeland, SC 29936, by Jasper County, South Carolina, (the "County") until Thursday, November 6, 2025, at 3:00 p.m. at which time all bids received will be publicly opened and read aloud in the Jasper County Council Chamber. This project is being funded through a SC Department of Transportation C-Fund grant, project C PCN P043136.

To be deemed "received", a bid may be submitted electronically through the County's Vendor Registry webpage to ensure that it remains sealed until the scheduled bid opening date and time. A link to the County's Vendor Registry webpage may be found under Bids & Solicitations, on the County's website at www.jaspercountysc.gov/services/bids-and-solicitations/.

A bid may also be submitted via mail or hand delivered in a sealed envelope to the address below and must be received no later than 3:00 p.m. on Thursday, November 6, 2025. Bidders choosing to submit a hard copy should submit an original and two copies. Any bids submitted or delivered after the above time will **NOT** be accepted under any circumstances.

Bids should be mailed or hand delivered to:

Kimberly Burgess
Director Administrative Services
Jasper County Government Building
358 Third Avenue, Suite 304
PO Box 1194
Ridgeland, SC 29936

The bid opening will take place in Jasper County Council Chamber at the address below:

Clementa C. Pinckney
Jasper County Government Building
358 3rd Avenue, Third Floor
Ridgeland, SC 29936

The County's point of contact for this project is:

Dallas Lassiter
(843) 726-7740
dlassiter@jaspercountysc.gov



NOTICE OF INVITATION TO BID
IVTB #2025-13
HONEY HILL DRIVEWAY
JASPER COUNTY, SOUTH CAROLINA
OCTOBER 10, 2025

Description of Work:

Clear trees an additional 200 yards on SC Highway 336 at 1913 Old House Road, Ridgeland, SC 29936, according to plan which is attached.

All work shall be in accordance with SCDOT Permit Number 292315 which is attached.
All work shall be in accordance with attached plans.

- Utility Coordination and Protection (According to Plan)
- Traffic Control (According to Plan)
- Clearing Trees (According to Plan)
- Stump Grinding and Brush Hogging (According to Plan)

All bids should include any job-related permits, fees, licenses, and South Carolina and local sales tax (9%).

Bid Requirements:

Bids should be placed on company letterhead or a document providing the company name, address, and phone number.

The successful Bidder shall be required to furnish the County with a W-9, a certificate of insurance showing evidence of liability and workers compensation coverage in the amounts listed below.

INSURANCE REQUIREMENTS

The successful Bidder shall be required to provide proof of insurance in the following amounts.

- a. Workers' Compensation - The vendor shall provide coverage for its employees with statutory workers' compensation limits, and no less than \$1,000,000.00 for Employers' Liability. Said coverage shall include a waiver of subrogation in favor of the OWNER and its agents, employees and officials.
- b. Commercial General Liability - The vendor shall provide coverage for all operations including, but not limited to, Contractual, Products and Completed Operations, and Personal Injury. The limits shall be no less than \$1,000,000.00, per occurrence, with a \$2,000,000.00 aggregate.
- c. Business Automobile Liability - The vendor shall provide coverage for all owned, non-owned and hired vehicles with limits of not less than \$1,000,000.00, per occurrence, Combined Single Limits (CSL) or its equivalent.



All Bids will remain subject to acceptance for sixty (60) days after the day of the Bid opening. Jasper County (Owner) reserves the right to reject any or all bids, including without limitation



**NOTICE OF INVITATION TO BID
IVTB #2025-13
HONEY HILL DRIVEWAY
JASPER COUNTY, SOUTH CAROLINA
OCTOBER 10, 2025**

the right to reject any or all nonconforming, non-responsive, unbalanced or conditional Bids. Owner also reserves the right to waive all informalities not involving price, time or changes in the Work and to negotiate contract terms with the Successful Bidder.

Honey Hill Battlefield Driveway Sight Distance Clearing Location Maps

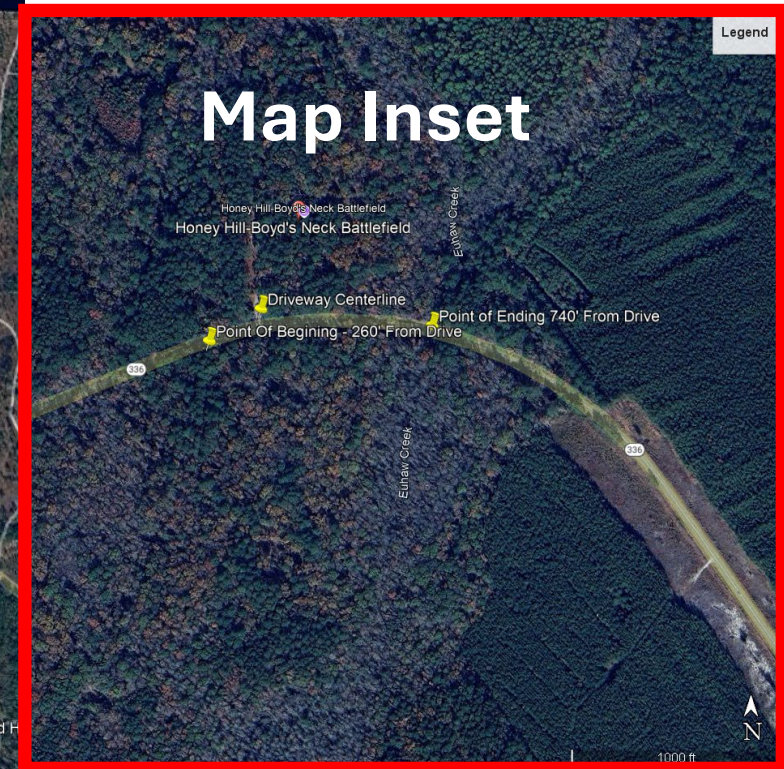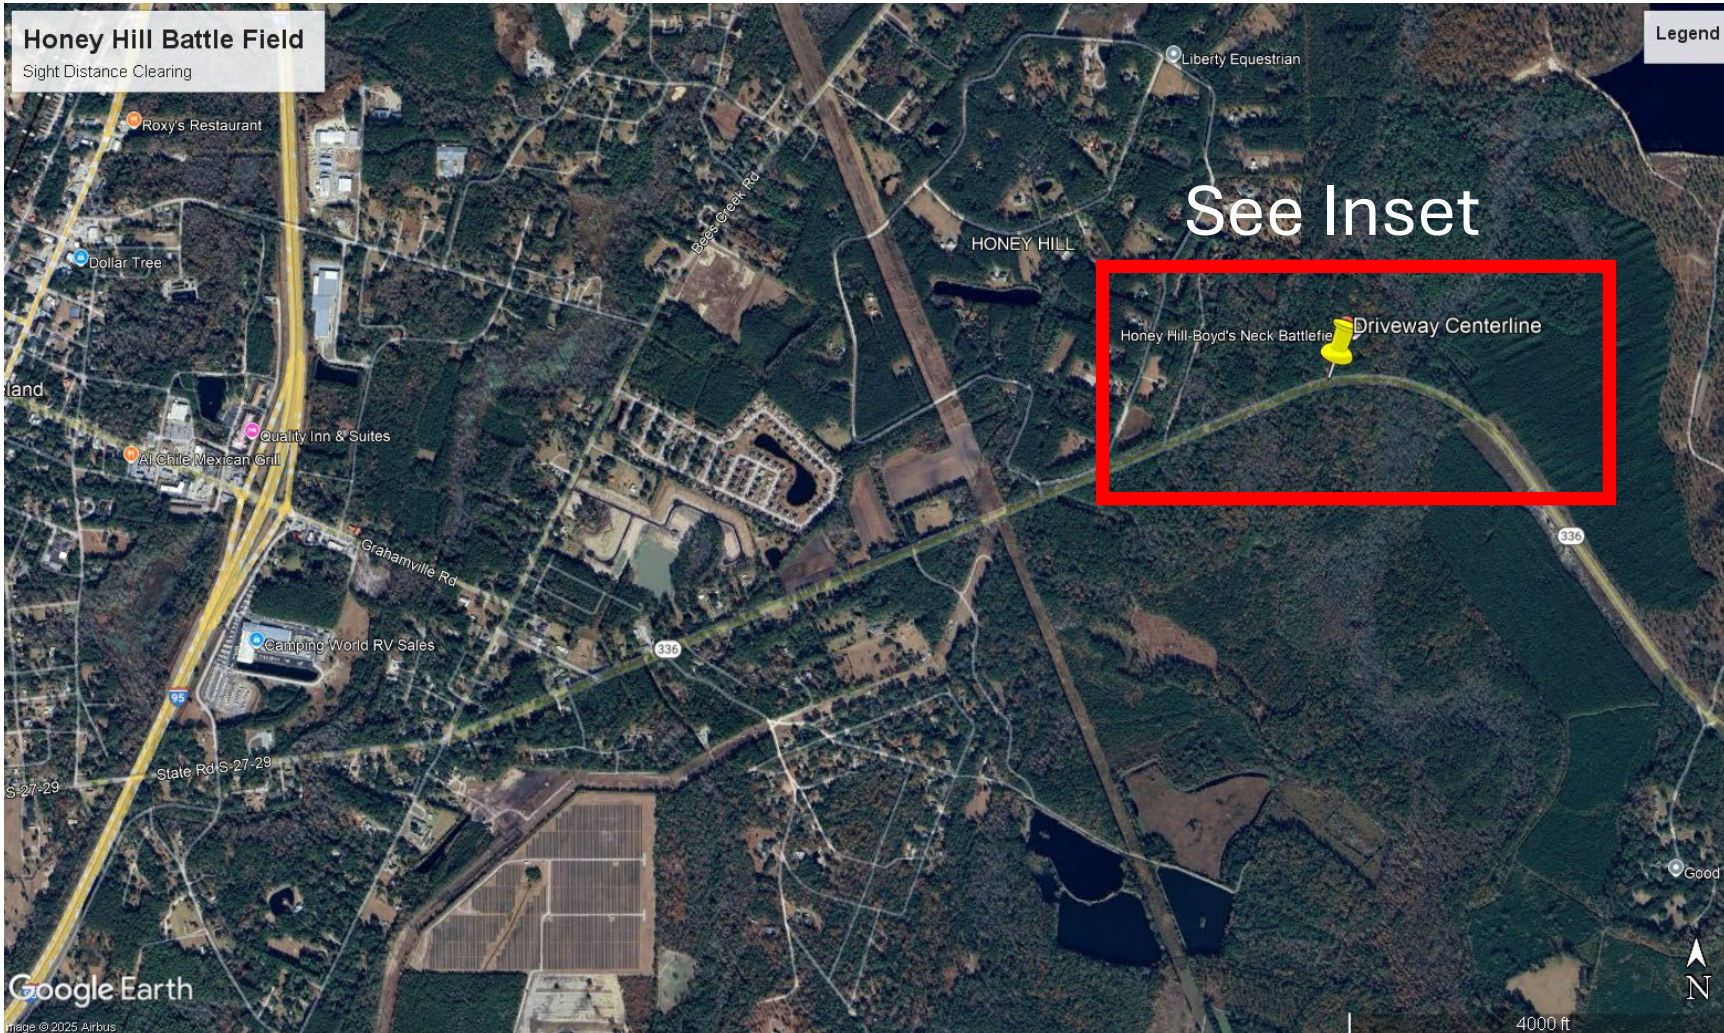

Honey Hill Battlefield Driveway Sight Distance Clearing

Point of Beginning

Approximately 260' West of Driveway Centerline
South Side of Road



Centerline of Drive

North Side of Road



Honey Hill Battlefield Driveway Sight Distance Clearing


Tree Line Starts

Approximately 365' East of Driveway Centerline
South Side of Road



Point of Ending

Center Line of Euhaw Creek Approximately 740'
East of Driveway Centerline South Side of Road

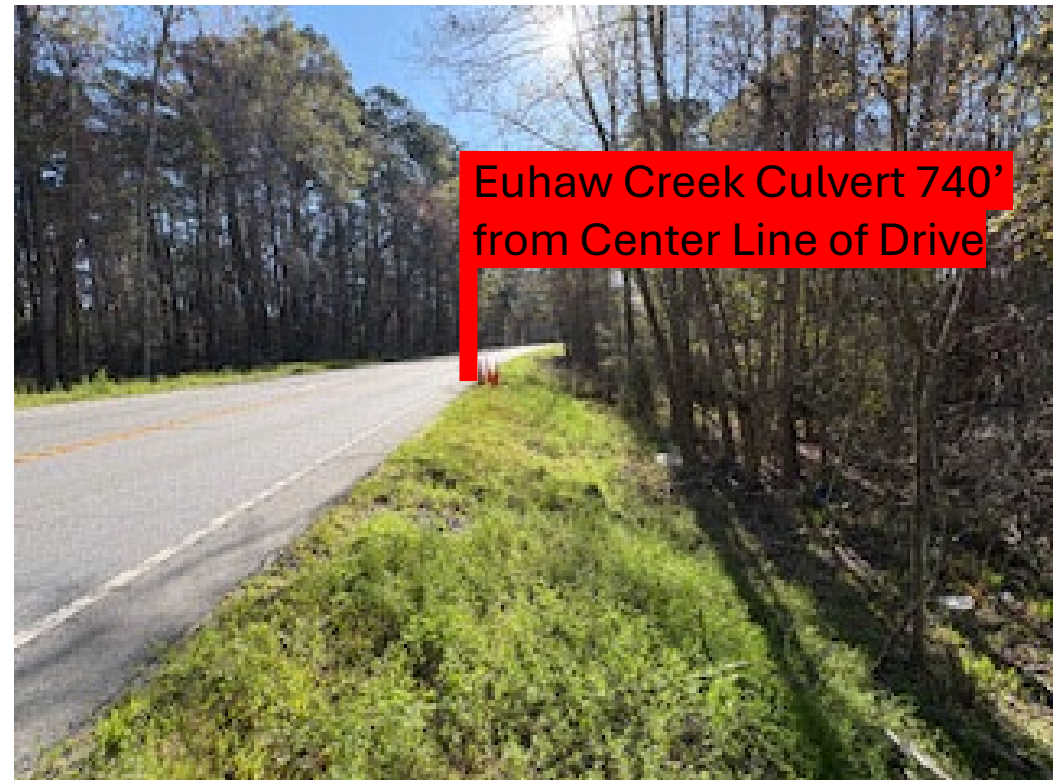

Honey Hill Battlefield Driveway Sight Distance Clearing

Items of Work

1. SCDOT Permit
 - All work shall be in accordance with SCDOT Permit Number 292315
2. Utility Coordination and Protection
 - Call 811 and coordinate with and protect all existing underground and overhead utilities
3. Clearing Trees with Traffic Control
 - Cut trees within 6” of ground level and remove timber according to industry best practices.
 - Area to be cut is on the south side of road starting approximately 365’ east of the centerline of Honey Hill Battlefield drive to Euhaw Creek, approximately 375’ in length, and between the south edge of pavement to the power line.
 - There are approximately 75 trees in this area.
 - Tree cutting operations shall take place between 9am and 3pm. During the cutting operation the eastbound lane shall be closed with a flagging operation in accordance with SCDOT Standard Drawings 610-005-00 and 610-005-10. When trees are being dropped, traffic will be stopped in both directions.
4. Stump Grinding and Brush Hogging with Traffic Control.
 - Prepare the area so that a tractor with a deck mower can maintain the area. Seed and mulch disturbed area.
 - Area to be addressed is on the south side of road starting approximately 260’ west of the centerline of Honey Hill Battlefield drive to a point approximately 365’ east of the centerline of the drive, approximately 625’ in length, and between the south edge of pavement to the power line.
 - There are approximately 110 stumps in this area.
 - Stump grinding and brush hog operation shall have a shoulder closure in accordance with SCDOT Standard Drawings 610-205-00.



SAFETY IS IN YOUR HANDS.
EVERY DIG. EVERY TIME.

Honey Hill Battlefield Driveway Sight Distance Clearing

[illegible][illegible][illegible]

SOUTH CAROLINA DEPARTMENT OF TRANSPORTATION
Encroachment Permit

Permit No : 292315

Permit Decision Date :
4/30/2025

Expiration Date : 4/30/2026

Type Permit :LANDSCAPING

Location:

<u>District</u>	<u>Work County</u>	<u>Type</u>	<u>Route</u>	<u>Aux</u>	<u>Begin MP</u>	<u>End MP</u>
6	Jasper, SC	SC	336	None	11.640	10.478

Contact Information

Applicant: JasperCounty

Phone: (843)226-5817

Contact: Jim Iwanicki

Address: PO Box 1244,

City: Ridgeland

State: SC

Zip: 29936

Comments

On South Side of Road. Between South Edge of Pavement and Power Line. 260 West of Honey Hill Battlefield Drive to Euhaw Creek. Approximately 1000 feet in length.

Special Provisions:

0004 - SCDOT SHALL BE NOTIFIED WHEN WORK DEFINED IN THE PERMIT STARTS AS WELL AS WHEN THE WORK IS COMPLETED. REFERENCE SHALL BE MADE BY PERMIT NUMBER.

0005 - APPLICANT SHALL PROVIDE TO THE DEPARTMENT THE OPPORTUNITY OF ATTENDING ANY PRE-CONSTRUCTION MEETING PRIOR TO THE BEGINNING OF WORK.

0101 - SHOULDER SOD DESTROYED BY THIS INSTALLATION TO BE REPLACED FOR THE ENTIRE AREA. THE AREA SHALL BE RE-SHAPED AND ROLLED TO THE CROSS SECTION EXISTING PRIOR TO THIS WORK.

0105 - ALL EXCAVATED MATERIAL SHALL BE PLACED ON THE SIDE OF THE TRENCH AWAY FROM THE TRAVELED ROADWAY, AND SHALL BE NO CLOSER THAN FIFTEEN (15) FEET TO THE EDGE OF PAVEMENT.

0122 - NO GUYS OR STUBS SHALL BE CLOSER THAN MAIN POLE FROM THE CENTER-LINE OF ROADWAY.

0123 - ALL WORK PERFORMED IN CONNECTION WITH THIS PERMIT SHALL CONFORM TO THE SCDOT "A POLICY FOR ACCOMODATING UTILITIES ON HIGHWAY RIGHT-OF-WAY" MOST CURRENT EDITION.

0125 - ALL CROSSLINE PIPES ARE TO BE LOCATED AND FLAGGED PRIOR TO BEGINNING OPERATION.

0209 - DISTURBED VEGETATION SHALL BE RESEEDDED ACCORDING TO THE SPECIFICAION FOR HIGHWAY CONSTRUCTION.

0301 - THE DITCHES AND/OR SHOULDERS DISTURBED DURING THE INSTALLATION SHALL BE RE-ESTABLISHED TO PROPER GRADE, ORIGINAL CROSS SECTION, STABILIZED, AND ALL DRAIN PIPES CLEARED.

0302 - NO EXCAVATION SHALL BE LEFT OPEN ALONG HIGHWAY.

0304 - PAVEMENT MARKINGS ALTERED DURING THIS INSTALLATION SHALL BE RESTORED BY THE APPLICANT.

0310 - FIELD CHANGES, IF NECESSARY, MUST BE APPROVED IN WRITING BEFORE ACTUAL CONSTRUCTION OF PROPOSED CHANGES.

0311 - SEDIMENT AND EROSION CONTROL DEVICES SHALL BE USED TO MINIMIZE THE MOVEMENT OF SEDIMENT.

0312 - THE PERMITTEE SHALL HOLD THE DEPARTMENT HARMLESS FOR DAMAGES TO BOTH UPSTREAM AND DOWNSTREAM PROPERTIES.

0313 - TIMER TO BE SET FROM MIDNIGHT TO 5:00 A.M. ONLY. WINTER USE OF SPRINKLERS SHALL BE LIMITED TO TIMES WHEN THE TEMPERATURE IS FORTY (40) DEGREES AND RISING TO PREVENT THE POSSIBILITY OF ICE FORMING ON THE PAVEMENT.

0314 - PERMITTEE AGREES THAT THE INSTALLATION, OPERATION AND MAINTENANCE OF THE FACILITIES WILL BE ACCOMPLISHED WITHOUT ACCESS FROM THE THROUGH TRAVEL ROADWAYS OR THE RAMPS OF THE INTERSTATE. NO VEHICLES, EQUIPMENT, OR MATERIAL SHALL BE CLOSER THAN 30 FEET FROM EDGE OF PAVEMENT DURING PROPOSED WORK.

0316 - ALL NON-PERMITTED OBJECTS ON THE RIGHT-OF-WAY, WHICH MUST BE REMOVED, SHALL NOT BE REPLACED ON THE RIGHT-OF-WAY WITHOUT WRITTEN PERMISSION OF THE DEPARTMENT.

0317 - THE APPLICANT IS TO PROVIDE ALL THE NECESSARY MAINTENANCE TO THE AREA BEAUTIFIED.

0318 - THE APPLICANT SHALL BE RESPONSIBLE FOR IMMEDIATE REMOVAL OF SUCH TRAFFIC HAZARDS AS MUD, DEBRIS, LOOSE STONE, AND TRASH AS MAY BE WASHED OR SPILLED ON THE TRAVELED ROADWAY AS A RESULT OF THE PROPOSED WORK.

0319 - ALL VEGETATION WITHIN SITE AREA SHALL NOT EXCEED 30 INCHES, TREE LIMBS SHALL NOT BE PERMITTED BELOW 4' 9" FROM GROUND.

0320 - ALL DEBRIS TO BE CLEARED FROM THE RIGHTS-OF-WAY WITHIN TEN (10) DAYS.

0323 - SCDOT WILL NOT BE RESPONSIBLE FOR THE REPLACING OF THE SOD IF WE HAVE TO DO ANY WORK IN THE DITCH.